

## POSTAL PATRON

## Salem and Beverly Water Supply Board 2009 Water Quality Report

### 2009 Water Quality Report

This report describes the Salem and Beverly Water Supply Board's (the Board) drinking water sources and treated water quality for 2009.

This publication is mandated by the federal public right-to-know regulation requiring community water suppliers to provide specific treated water quality information annually to customers.

This report includes additional information beyond the minimum federal requirements as part of our ongoing commitment to increase public awareness of your drinking water and protection of this valuable resource.

### For More Information...

**About contaminants and potential health effects,** please call the EPA's Safe Drinking Water Hotline at 800-426-4791 or visit [www.epa.gov/safewater](http://www.epa.gov/safewater).

**About the Salem and Beverly Water Supply Board (PWS ID #3030001) and your water quality,** please call Thomas Knowlton, Superintendent, at 978-922-2600. The Board meets at the Water Filtration plant at 50 Arlington Avenue in Beverly. The Board usually meets on the Tuesday after the first Monday of each month, but please call to confirm that a meeting is scheduled. Notices of these meetings are posted in the Beverly and Salem City Halls.

**About your water distribution system,** please contact the appropriate department in your city:


**Salem Water Department**  
(PWS ID # 3258000)  
phone: 978-745-9595

**Beverly Water Department**  
(PWS ID # 3030000)  
phone: 978-921-6000

## Sources of Your Drinking Water

Salem and Beverly use approximately 3.5 billion gallons of drinking water per year. This water is drawn from the Ipswich River and three reservoirs: Wenham Lake Reservoir, Putnamville Reservoir and Longham Reservoir. Beverly's water mains have interconnections with Wenham, Danvers, and Manchester. Salem's water mains have interconnections with Marblehead and Peabody.

The Board recognizes the practical and ecological importance of storing high winter and spring flows of the Ipswich River for use in summer when river flows are naturally low. During winter and spring, water is pumped from the Ipswich River to Putnamville Reservoir and/or Wenham Lake Reservoir for storage and use in summer. Water is not pumped from the river during summer. Similarly, Longham Reservoir augments Wenham Lake Reservoir.

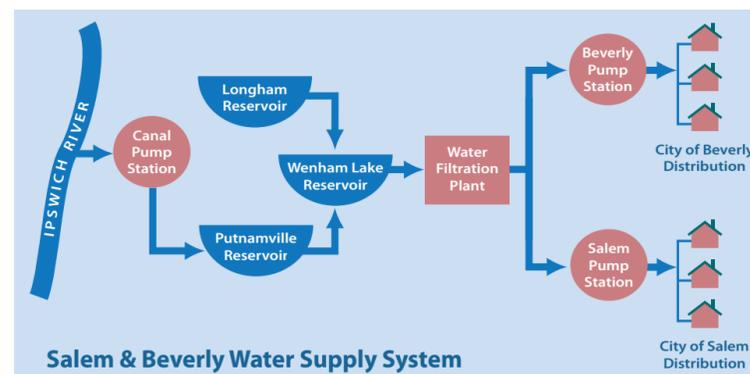

## Nonpoint Source Pollution

The US Environmental Protection Agency (EPA) Phase II Stormwater regulations require all communities with populations under 100,000 to implement control measures aimed at reducing water pollution caused by stormwater runoff. Stormwater runoff is a major cause of nonpoint source (NPS) pollution.

Approximately 40 percent of America's surveyed lakes, rivers, and estuaries fail to meet standards for safe fishing or swimming. According to the EPA, NPS pollution constitutes the nation's largest source of water quality problems.

NPS pollution occurs when runoff (rainwater or snowmelt) moves over the land picking up sediments and contaminants and then deposits them into lakes, rivers, and coastal waters. Overland flow picks up pollutants from driveways, crops, industrial sites, or malfunctioning septic systems before discharging into the river or storm drain.

NPS pollution can lead to beach closures, fish kills, habitat destruction, and unsafe drinking water. Unlike point sources (e.g., discharge pipes from facilities), *Nonpoint* continued on next page

*Nonpoint* continued from previous page  
nonpoint sources are diffuse, which makes them difficult to trace and control.

Everyone contributes to NPS pollution in one way or another. Land use such as agriculture, forestry, construction, and septic systems are all potential sources of non-point contaminants. Household contributors include improperly disposed pet waste, lawn fertilizer, paints, and motor oil. Automobiles, factories, and wood stoves emit airborne contaminants that return to the earth in the form of rain or snow. The amount of these contaminants that reaches water sources is increased by impermeable surfaces, such as roofs and pavement, which keep the soil from naturally filtering stormwater.

The Cities of Salem and Beverly are in the process of implementing Stormwater Management Plans (SWMP) designed to reduce stormwater runoff pollution and protect your source and surface waters. Public education and participation are required control measures for the SWMP.

## Massachusetts Source Water Assessment and Protection (SWAP) Program

Source Water Assessment and Protection (SWAP) Program

The Source Water Assessment and Protection (SWAP) program assesses the susceptibility of public water supplies to contamination due to land uses and activities within the recharge area of Salem and Beverly's water supply. The water supply for these towns consists of surface water from Wenham Lake (Source ID # 3030001-01S), Longham Reservoir (Source ID # 3030001-02S), Putnamville Reservoir (Source ID # 3030001-03S), and the Ipswich River (Source ID # 3030001-04S).

A susceptibility ranking of high was assigned to this system using the information collected during the assessment by the DEP. A high ranking is given to any water supply that has at least one high threat land use within the water supply protection area. Since there are seventeen high threat land uses within the protection area the Salem and Beverly water supply must be assigned a high susceptibility ranking. The potential contaminant sources within the protection area are: manure storage or spreading, pesticide storage or use, airports, body shops, gas stations, service stations/auto repair shops, bus and truck terminals, dry cleaners, photo processors, repair shops (engine,


appliances, etc.), hazardous materials storage, machine/ metalworking shops, RCRA TSDF facilities, large quantity hazardous waste generators, landfills and dumps, military facilities (past and present) type: former NIKE sites, and underground storage tanks. This ranking does not imply that the towns have poor water quality or will have poor water quality in the future. It only draws attention to various activities within the watershed that may be potential sources of contamination.

The SWAP then assesses what the water supplier is doing to prevent contamination and recommends other measures that can be taken to further protect the sources. Some source protection measures Salem and Beverly have already implemented include reviewing the development of plans in the City of Beverly and the Town of Wenham, conducting monthly stream monitoring throughout the watersheds, and managing geese on Wenham Lake.

If you would like more information, the complete SWAP report is available at the Salem and Beverly Water Supply Board and online at

<http://www.mass.gov/dep/water/drinking/3030001.pdf>. You can also call the Salem and Beverly Water Supply Board at 978-922-2600.

## Water Treatment and Distribution

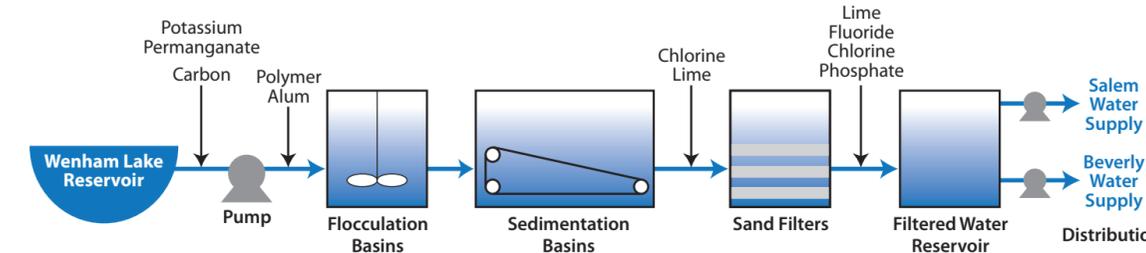

Water from the Ipswich River and the three reservoirs goes to a water filtration plant, operated 24 hours a day, 7 days a week by the Board. The plant removes naturally occurring impurities, as required by federal regulations and good public health practices, and delivers the water to pumping stations owned by the cities of Salem and Beverly. These pumping stations deliver water to your home in pipes owned and maintained by each city water department.

Before water enters the filtered water reservoir that precedes the pumping stations, it is fluoridated. Fluoride is added to prevent tooth decay/cavities.

To improve corrosion control in the distribution pipes, the Board modified existing treatment by switching to a new phosphate additive that is designed to optimize corrosion control throughout the distribution system and minimize dissolved lead in the pipes and household plumbing.

**En Español:** El informe contiene información importante sobre la calidad del agua en su comunidad. Tradúzcalo o hable con alguien que lo entienda bien.

**En Français:** Le rapport contient des informations concernant la qualité de l'eau de votre communauté. Faites-le traduire, ou parlez-en à un ami qui le comprend bien.

## Treated Water Quality Data for 2009

Listed below are 25 contaminants detected in Salem's and Beverly's drinking water in 2009. We tested for more than 100 other contaminants in 2009 that were also not detected in your water.

| Substance   | Units   | Highest Level Detected | Range of Detection          | Highest Level Allowed (MCL) | Ideal Goal (MCLG) | Sources of Contaminant  |
|---|---------|------------------------|-----------------------------|-----------------------------|-------------------|---|
| <b>Microbiological</b>                                      |         |                        |                             |                             |                   |   |
| Total Organic Carbon <sup>1</sup>                           | ppm     | 2.3                    | 1.8 – 2.3                   | TT                          | NR                | Naturally present in the environment  |
| Turbidity <sup>2</sup>                                      | NTU     | 0.24                   | 0.06 – 0.24                 | TT = 0.3                    | NR                | Soil runoff   |
| The lowest monthly percentage of samples < 0.3 NTU was 100% |         |                        |                             |                             |                   |   |
| <b>Inorganic Chemicals</b>                                  |         |                        |                             |                             |                   |   |
| Arsenic   | ppb     | 1                      | no range,1 sample required  | 10                          | 0                 | Erosion of natural deposits; runoff from orchards; runoff from glass and electronics production wastes                    |
| Barium  | ppm     | 0.021                  | no range,1 sample required  | 2                           | 2                 | Discharge of drilling wastes, discharge from metal refineries, erosion of natural deposits                                |
| Calcium   | ppm     | 20.6                   | no range,1 sample required  | NR                          | NR                | Naturally present in the environment  |
| Fluoride <sup>3</sup>                                       | ppm     | 1.31                   | 0.88 – 1.31                 | 4                           | 4                 | Water additive which promotes strong teeth, discharge from fertilizer and aluminum factories, erosion of natural deposits |
| Magnesium   | ppm     | 4.16                   | no range,1 sample required  | NR                          | NR                | Naturally present in the environment  |
| Nitrate   | ppm     | 0.12                   | no range, 1 sample required | 10                          | 10                | Runoff from fertilizer use, leaching from septic tanks, sewage, erosion of natural deposits                               |
| Potassium   | ppm     | 2.06                   | no range,1 sample required  | NR                          | NR                | Naturally present in the environment  |
| Sodium <sup>4</sup>   | ppm     | 39.4                   | no range,1 sample required  | NR                          | NR                | Naturally present in the environment  |
| <b>Radionuclides</b>  |         |                        |                             |                             |                   |   |
| Beta Particle <sup>5</sup>                                  | mrem/yr | 2.4                    | 2.1 – 2.4                   | 4                           | 0                 | Decay of natural and man-made deposits  |
| Gross Alpha <sup>5</sup>                                    | pCi/L   | 0.23                   | 0.14 – 0.23                 | 15                          | 0                 | Erosion of natural deposits   |
| Radium <sup>6</sup> (226 & 228 combined)                    | pCi/L   | 0.3                    | 0.1 – 0.3                   | 5                           | 0                 | Erosion of natural deposits   |

| Secondary Contaminant | Units | Highest Level Detected | Range of Detection         | SMCL     | Sources of Contaminant   |
|-----------------------|-------|------------------------|----------------------------|----------|--|
| Aluminum              | ppb   | 120                    | no range,1 sample required | 50 - 200 | Naturally present in the environment   |
| Chloride              | ppm   | 76.8                   | no range,1 sample required | 250      | Runoff from road de-icing, use of inorganic fertilizers, landfill leachates, septic tank effluents, animal feeds, industrial effluents, irrigation drainage, and seawater intrusion in coastal areas |
| Sulfate               | ppm   | 22.7                   | no range,1 sample required | 250      | Naturally present in the environment   |

|                                 |     |     |                            |    |    |   |
|---------------------------------|-----|-----|----------------------------|----|----|---|
| <b>Unregulated Contaminants</b> |     |     |                            |    |    |   |
| Bromodichloromethane            | ppb | 16  | no range,1 sample required | NR | 0  | Trihalomethane; by-product of drinking water chlorination |
| Chloroform                      | ppb | 41  | no range,1 sample required | NR | 70 | Trihalomethane; by-product of drinking water chlorination |
| Dibromochloromethane            | ppb | 4.5 | no range,1 sample required | NR | NR | Trihalomethane; by-product of drinking water chlorination |

#### Samples Collected from the Distribution System

| Substance           | Area    | Units | 90th Percentile | Range of Detection | Action Level | # of Samples that Exceeded Action Level | Ideal Goals |
|---------------------|---------|-------|-----------------|--------------------|--------------|---|-------------|
| Copper <sup>7</sup> | Salem   | ppm   | 0.161           | 0.014 – 0.357      | 1.3          | 0                                       | 1.3         |
|                     | Beverly | ppm   | 0.246           | 0.018 – 1.360      | 1.3          | 1                                       | 1.3         |
|                     | Both    | ppm   | 0.246           | 0.014 – 1.360      | 1.3          | 1                                       | 1.3         |
| Lead <sup>7</sup>   | Salem   | ppb   | 3               | ND – 230           | 15           | 1                                       | 0           |
|                     | Beverly | ppb   | 13              | ND – 891           | 15           | 3                                       | 0           |
|                     | Both    | ppb   | 5               | ND – 891           | 15           | 4                                       | 0           |

| Substance                          | Units | Highest Level Detected | Range of Detection         | Highest Level Allowed (MCL) | Ideal Goal (MCLG) | Sources of Contaminant                    |
|------------------------------------|-------|------------------------|----------------------------|-----------------------------|-------------------|---|
| <b>Disinfection Contaminants</b>   |       |                        |                            |                             |                   |   |
| Haloacetic Acids                   | ppb   | 25.7 <sup>9</sup>      | ND – 48.4 <sup>10</sup>    | 60 <sup>11</sup>            | NR                | By-product of drinking water chlorination |
| Total Trihalomethanes <sup>9</sup> | ppb   | 67.6 <sup>9</sup>      | 33.3 – 117.8 <sup>10</sup> | 80 <sup>11</sup>            | NR                | By-product of drinking water chlorination |
| Chlorine (total)                   | ppm   | 0.82 <sup>9</sup>      | 0.00 – 2.04                | 4 (MRDL)                    | 4 (MRDLG)         | Water additive used to control microbes   |
| <b>Microbiological</b>             |       |                        |                            |                             |                   |   |
| Total Coliform Bacteria            | —     | ND                     | ND in 1,368 samples        | 5%                          | 0                 | Naturally present in the environment      |

#### Notes

<sup>1</sup> Finished water TOC compliance is determined in accordance with the requirements of 310 CMR 22.07E (6)(e)4a. TOC levels for 2009 were in compliance with applicable criteria.

<sup>2</sup> Turbidity is a measure of the cloudiness of the water. Turbidity is monitored because it is a good indicator of water quality and the effectiveness of filtration. 95% of monthly samples must be < 0.3 NTU and no samples can exceed 1 NTU.

<sup>3</sup> Fluoride also has a SMCL of 2 ppm.

<sup>4</sup> The Massachusetts DEP Office of Research and Standards has set a guideline concentration of 20 ppm for sodium. Sodium-sensitive individuals, such as those experiencing hypertension, kidney failure, or congestive heart disease, should be aware of the sodium levels if exposures are being carefully controlled.

<sup>5</sup> Gross alpha and beta particle testing was performed in 2004, and will be performed again in 2014.

<sup>6</sup> Because past monitoring results for radium have been extremely low, the Board is now on a 9-year monitoring interval. Radium testing was performed in 2003.

<sup>7</sup> See lead and copper compliance monitoring section below for details on lead and copper sampling.

<sup>8</sup> Some people who drink water containing trihalomethanes in excess of the MCL over many years experience problems with their livers, kidneys, or central nervous systems. They may have a greater risk of getting cancer.

<sup>9</sup> Highest level detected is based on the running annual average of data from the last three quarters of 2008 and the four quarters of 2009.

<sup>10</sup> The range of detection is based on the samples collected quarterly at each sampling site and is not an average.

<sup>11</sup> The highest level allowed (MCL) for total trihalomethanes and haloacetic acids based on the average of four quarterly samples.

#### Lead and Copper Compliance Monitoring

There is no lead in the water that enters the distribution system. Lead enters the drinking water through the corrosion of household plumbing. Lead in tap water is controlled by adding corrosion inhibiting chemicals to the water supply during the treatment process.

Since the Board began implementing a new blended phosphate corrosion control treatment in 2004, frequent monitoring of lead and copper levels has been continuing in the distribution system. This monitoring examines the progress of the corrosion control treatment process and will continue until the treatment is optimized in accordance with the DEP Lead and Copper Rule.

During 2008, one monitoring round was performed in August and September. During this time, 60 samples were collected from residents’ homes, 30 in Salem and 30 in Beverly. Federal and State drinking water standards require that lead and copper levels in drinking water be less than 15 ppb and 1.3 ppm, respectively, in at least 90 percent of the samples tested. These limits are referred to as "Action Levels". The 90th percentile levels in the samples tested were 5 ppb lead and 0.246 ppm copper. These concentrations are below the drinking water standards and indicate that the new treatment is working effectively in the system. The Board will conduct another round of compliance sampling from June to September 2011 to continue to evaluate the performance and effectiveness of the corrosion control treatment process.

### Important Health Information

Some people may be more vulnerable to contaminants in drinking water than people in the general population. Immuno-compromised persons such as those with cancer undergoing chemotherapy, persons who have undergone organ transplants, those with HIV/AIDS or other immune system disorders, elderly persons, and infants can be particularly at risk from infections. These people should seek advice about drinking water from their health care providers. EPA/CDC guidelines on appropriate means to lessen the risk of infection by Cryptosporidium and other microbial contaminants are also available from the EPA’s Safe Drinking Water Hotline at 800-426-4791.

#### Definitions

**Action Level** – The concentration of a contaminant which, if exceeded, triggers a treatment or other requirements that a water system must follow.

**MCLG (Maximum Contaminant Level Goal)** – The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety.

**MCL (Maximum Contaminant Level)** – The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to the MCLGs as feasible using the best available treatment technology.

**MRDL (Maximum Residual Disinfectant Level)** – The highest level of a disinfectant (chlorine) allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial contaminants.

**MRDLG (Maximum Residual Disinfectant Level Goal)** – The highest level of a disinfectant (chlorine) below which there is no known risk to health. MRDLGs do not reflect the benefits of the use of disinfection to control microbial contaminants.

**mrem/yr (millirems per year)**– a measure of radiation absorbed by the body.

**NR (Not regulated)** – Unregulated contaminants are those for which EPA has not established drinking water standards. The purpose of unregulated contaminant monitoring is to assist EPA in determining their occurrence in drinking water and whether future regulation is warranted.

**NTU (Nephelometric Turbidity Units)** – A measure of the suspended material in water.

**pCi/L (picoCuries/L)** – A measure of the radioactivity in water.

**ppb** – One part per billion; equivalent to \$1 in \$1,000,000,000.

**ppm** – One part per million; equivalent to \$1 in \$1,000,000.

**SMCL (Secondary Maximum Contaminant Level)** – concentration limit for a contaminant which may have aesthetic effects such as taste, odor, or staining.

**TT (Treatment Technique)** – A required process intended to reduce the level of a contaminant in drinking water.

**90<sup>th</sup> percentile** – Out of every 10 homes sampled, 9 were below this level.

## Compliance with Health and Safety Standards

The Board is committed to providing drinking water that meets or surpasses all primary and secondary health and safety standards.

State and federal regulators routinely monitor our compliance and testing protocols to ensure that we deliver safe drinking water to customers. Laboratory staff at our water filtration plant conduct more than 38,000 water-quality tests on your drinking water every year.



# Substances Found in Drinking Water

All sources of drinking water (both tap water and bottled water) contain some naturally occurring contaminants or substances. As rain passes through the atmosphere, travels over the surface of the land into ponds, streams, rivers, lakes and reservoirs or passes through the ground into wells and springs it dissolves naturally-occurring gasses and minerals and, in some cases naturally-occurring radioactive material in the rocks. The water can also pick up substances resulting from animals or human activity. Drinking water, including bottled water, will contain at least small amounts of some substances or contaminants. Removing all contaminants would be extremely expensive and in most cases, would provide no added health protection. In fact, water without some dissolved minerals and gasses tastes bad and can be harmful. Therefore, the presence of some substances, referred to as contaminants, does not necessarily indicate that the water poses a health risk. More information about contaminants and potential health effects can be obtained by calling the EPA’s Safe Drinking Water Hotline at 800-426-4791.

To ensure that your water is safe to drink, the EPA regulates the allowable amount of certain contaminants in the water provided by public water systems. The Food and Drug Administration (FDA) and the Massachusetts Department of Public Health regulations establish limits for contaminants in bottled water that

# Copper and Lead

Copper is an essential nutrient, but some people who drink water containing copper in excess of the action level over a relatively short amount of time could experience gastrointestinal distress. Some people who drink water containing copper in excess of the action level over many years could suffer liver or kidney damage. People with Wilson’s Disease should consult their doctor.

If present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children. Lead in drinking water is primarily from materials and components associ-

ated with service lines and home plumbing. This report provides you with information about the contaminants found naturally in your drinking water, the levels at which they were found, and the likely source of each contaminant.

- Microbial contaminants**, such as viruses and bacteria, may come from sewage treatment plants, septic systems, agricultural livestock operations and wildlife.

- Inorganic contaminants**, such as salts and metals, can be naturally-occurring or result from urban stormwater runoff, industrial, or domestic wastewater discharges, oil and gas production, mining and farming.

- Pesticides and herbicides** may come from a variety of sources such as agriculture, urban stormwater runoff, and residential uses.

- Organic chemical contaminants** include synthetic and volatile organic chemicals that are by-products of industrial processes and petroleum production and can also come from gas stations, urban stormwater runoff and septic systems.

- Radioactive contaminants** can be naturally-occurring or be the result of oil and gas production and mining activities.

ated with service lines and home plumbing. The Board is responsible for providing high quality drinking water, but cannot control the variety of materials used in plumbing components. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minutes before using water for drinking or cooking. If you are concerned about lead in your drinking water, you may wish to have your water tested. Information on lead in drinking water, testing, methods, and steps you can take to minimize exposure is available from the Safe Drinking Water Hotline or at http://www.epa.gov/safewater/lead.

**Toilet:** Never use the toilet as a wastebasket. Saves 1.5 to 5 gallons per flush.

**Washing Machine:** Run your washing machine only when full, or adjust the water level setting appropriately. Washing machines use 25-30 gallons per load.

## Outdoor Water Conservation

- Water your lawn only every 3 to 5 days as needed.
- Water during the early morning or late evening hours.
- Do not use automatic sprinkler systems.

- If you do own an automatic sprinkler system, install a moisture sensor.
- Consider alternative landscaping, using native grasses and plants. This type of landscaping requires much less water.

Water conservation is always good practice; it can help save valuable resources, save energy, save the environment, and save you money!